


# FIXING INSTALLATION FOR TOP FIXING PANS

**FITTING INSTRUCTIONS FOR STANDARD TOP FIXING PANS – THIS TYPE OF PAN IS WHERE YOU HAVE NO ACCESS TO THE FIXING BOLTS UNDERNEATH THE PAN AND CAN ONLY TIGHTEN AND FIX THE SEAT FROM THE TOP OF THE PAN - NORMALLY BACK TO WALL PANS**

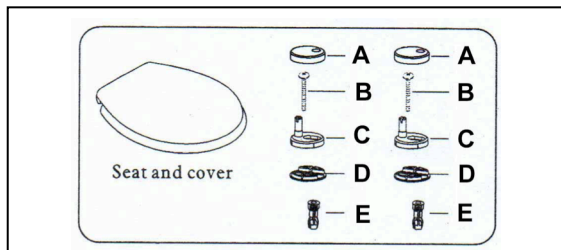

## Component List

- A. Chrome Cover Plate x 2
- B. Long through Bolt x 2
- C. Hinge Plate x 2
- D. Hinge Plate washer x 2
- E. Expansion Bolt x 2

Tools Required 

## Step 1

1. Fit component E (Expansion Bolt) into seat fixing holes on top of pan.
2. Fit component D (Hinge Plate Washer) to underside of component C (Hinge Plate) and place over seat fixing hole (with expansion nut fitted) on top of the pan.
3. Place component B (Long through bolt) through components C and D and into the holes of component E (Expansion Nut) and using a screwdriver, tighten until it is loosely secured to allow for adjustment of the seat on the pan.

## Step 2

1. Adjust component C (the Hinge Plates) and then fit the seat onto component C (the Hinge Plates).
2. Adjust the seat to fit the pan front and back.
3. Remove the seat by way of depressing either the one button or two buttons provided on your particular model and using a screwdriver, fully tighten component C (the Hinge Plates).

## Step 3

1. Fit component A (Chrome Cover Plates) over component C (the tightened Hinge Plates).
2. Fit the seat to component C (the Hinge Plates) by pushing down over the Hinge Plate pegs.

## CLEANING INSTRUCTIONS

To remove your seat at any time for cleaning, depress either the one button or two buttons provided on your seat and lift off in a vertical motion.

Only use clean soapy water. The seat can be steam cleaned.

Do not use abrasive cleaning products or products containing chlorine or acids, as these may cause yellowing or peeling of the material. Use ONLY a mild detergent/non-abrasive household cleaner or neutral soap or natural household cleaning products, which are best for effective, problem-free cleaning. Do not use bleach or any products containing bleach on the seat. Do not mix cleaning products as this can cause a reaction. After cleaning, ensure the chrome hinge is dried. Leave the seat and lid up whenever strong cleaning products (such as bleach) are left in the pan bowl to prevent damage to the seat from the vapours.

## CARE INSTRUCTIONS

- Seat & hinges to be adjusted before tightening
- This seat is equipped with a slow close mechanism - do not force down